

Toilet, Urinal & Shower Compartments




- BAKED ENAMEL FINISH
- VERSATILE ARRANGEMENTS
- LAYOUT CONSULTATION
- FINE QUALITY, ATTRACTIVE
- COMPETITIVELY PRICED

wall measurements showing placements of urinals and closets will enable us to quickly quote your job.

IMMEDIATE DELIVERY FROM LOCAL STOCK!

Grab Bars Available in many sizes(1", 1 1/4", 1 1/2") lengths (12-52"), and configurations to meet Your State Codes.

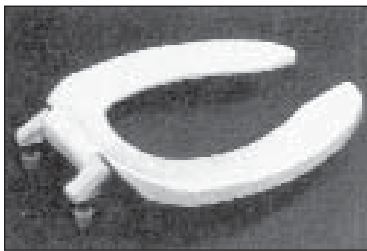

Olsonite

INSTITUTIONAL & COMMERCIAL SEATS

Packed six seats per case . Seats furnished with Hinges & Integral Bumpers


6 seats per case	VNS#
No. 5CC Regular Bowl, Open front LESS cover.	
WHITE	OC001
BLACK	OC002
No. 10CC Elongated Bowl, Open front LESS cover.	
WHITE	OC003
BLACK	OC004
No. 42 Regular Bowl, Open front WITH cover.	
WHITE	OC017
No. 46 Elongated Bowl, Open front WITH cover.	
WHITE	OC025
No. L210-N-CC Elongated Bowl, Open front LESS cover.	
WHITE	OC029

VNS#OC030-34...1 set Seat Bumpers
VNS#OC035-38...1 pair Seat Hinges
Specify Black Or White

LIFT SEAT FOR THE HANDICAPPED
Solid plastic seat mounted with 1" spacer to raise seat to 2" overall dimension.

N-SINK-GRATOR

COMMERCIAL DISPOSERS



- Stainless Steel Grind Chamber
- Sound and Vibration Barrier— 3/4" Thick resilient Hycar Mounting Gasket, enclosed in Chrome-plated Covers for Sanitation
- Double-tapered Timken Roller Bearing
- Centrifugal Moisture Shield to protect Bearing and Motor
- Totally Enclosed Motor, Dual-directional
- Controlled Power Air Flow Cools Motor for Efficiency and Longer Life.
- Must Have Phase & Voltage

H.P.	VNS#	Model	H.P.	VNS#	Model
1/2"	ID005	SS-50	2	ID016	SS-200
3/4"	ID007	SS-75	3	—	SS-300
1/2"	ID010	SS-100	5	—	SS-500
1 1/4"	ID012	SS-125	7 1/2"	—	SS-750
1 1/2"	ID015	SS-150	10	—	SS-1000

PHASE I & III = 600-608

PRICE INCLUDES BASE UNIT AND DIRECT-GROUND SHIPPING CHARGES ONLY.
SINK FLANGE MOUNTING ASSEMBLY, SPECIAL ADAPTERS, BAFFLES, ETC. AVAILABLE

HOT WATER DISPENSERS

190° HOT WATER, INSTANTLY, FOR:

- DISSOLVING
- BOILING
- BLANCHING
- COOKING
- THAWING
- MELTING
- MIXING
- SANITIZING
- WARMING



H-330

Capacity: 1/3 gallon, up to 40 cups of 190°F. water per hour.

Electrical: 120 volts A.C., 4.3 amps, 500 watts
Energy Consumption: .95 KWH/day, 3-wire cord and plug provided.

Valve: Self-closing.
Shipping Weight: 4 lbs.
VNS# ID301

Model HotI

H-770 Regular Model

Capacity: 1/2 gallon, up to 60 cups of 190°F. water per hour, when connected to hot water line.

Electrical: 750 Watts, 6.5 amps, 115 volts
Furnished with U.L. listed 3-ft., 14 gauge cord and 3 prong plug

Valve: instant Self-closing, 3 1/2" spout
Shipping Weight: 9 lbs.
VNS# ID311



Model H-770

H-778 Commercial Model (not illustrated)

Capacity: 1/2 gallon, up to 100 cups of 190°F. water per hour when connected to hot water line.

Electrical: 115 volts A.C., 11.3 amps, 1300 watts, furnished with U.L. listed 3-ft., 14 gauge cord and 3 prong plug

Energy Consumption: .95 KWH/day, 3-wire cord and plug provided.
Valve: Instant Self-closing, 4 1/2" spout, 4" faucet raiser.
Shipping Weight: 10 lbs. VNS# ID312

Olsonite Sani-Shield Seats

Built-in scientific protection against mold, mildew and destructive micro-organisms.

6 seats per case

No. 5CC AM Regular Bowl, Open front LESS cover.
WHITE

No. 10CC AM Elongated Bowl, Open front LESS cover.
WHITE