

BABBITT SPROCKET RIMS BRING HIGH VALVES WITHIN EASY REACH

The Babbitt Adjustable Sprocket Rim will provide for remote operation of gate, globe and angle valves in high, normally out-of-reach locations. Attaches to valve wheel for instant valve open/close response. Sprocket rim made from cast iron, chain guide is malleable iron. When ordering specify the sprocket and chain number, length and type.

Size No.	VNS #	Dia. of Sprocket Wheel In Inches	Weight In lbs.	Dia of Valve Wheels Rim Will Fit	Chain Size No.	Chain Weight per 100' In lbs.	BRASS CHAIN	RUSTPOOF CHAIN
0	BS027	4	2	2 to 4	0	10		
1	BS028	5 ¹ / ₈	4	4 ¹ / ₈ to 5 ¹ / ₈	1-2	17 ¹ / ₂		
1 ¹ / ₂	BS029	7 ¹ / ₂	5	6 to 7 ¹ / ₂	2	17 ¹ / ₂		
2	BS030	9	8	7 ¹ / ₄ to 9	2	17 ¹ / ₂		
2 ¹ / ₂	BS031	12 ¹ / ₂	15	9 ¹ / ₄ to 12 ¹ / ₂	2 ¹ / ₂ -3 ¹ / ₂	30		
3	BS032	15 ¹ / ₂	21	12 ¹ / ₄ to 15 ¹ / ₂	3	30		
3 ¹ / ₂	BS033	19	25	15 ¹ / ₄ to 19	3	30		
4	BS034	22	24	19 ¹ / ₄ to 22	4-5	35		



Quarter Turn
70-600 Series

BALL VALVES in Bronze
Reinforced Teflon* Seats and Stuffing box Seals
150 P.S.I. Saturated Steam Vacuum Service to 29" Mercury



- Bronze Valves — 4000 P.S.I. WOG, Cold, Non-Shock
- Also Available in Stainless Steel

3-Way Valve	
1/2"	CI091
3/4"	CI092
1"	CI093
1 1/2"	CI095
2"	CI096

BLOW-OUT PROOF STEM DESIGN
No lubrication required for life of valve

Deadman Spring Return			
1/4"	-	1"	CI205
3/8"	-	1 1/4"	CI206
1/2"	CI203	1 1/2"	CI207
3/4"	CI204	2"	CI208



FIG. B6561
Angle Pattern

SLOW-OPENING TYPE BLOW OFF VALVES

Handwheel operates the valve through gears by a rack and screw mechanism

	B6561 Angle	B6571 Y Pattern
1 1/2"	EV100	EV150
2"	EV101	EV151
2 1/2"	EV102	EV152

ALWAYS IN STOCK

How figure 6000 series operates — These Valves are of the outside Screw and Yoke type. The seat and disc are capable of withstanding the severe erosive flow of blow-down service. While quick opening Valve holds boiler water, the seat and disc can be easily removed for repair without removing the Valve from line.

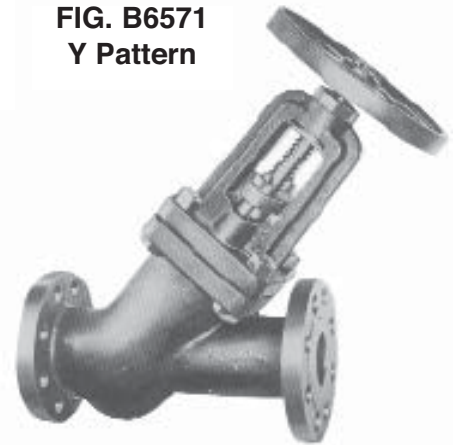


FIG. B6571
Y Pattern



LUNKENHEIMER
BRONZE Y BLOW-OFF VALVE
250 LB. S.P. 550°F — 400 LB. W.O.G.

"Renewo" Y Blow-Off
Fig. 180 Screwed

- 1"
- 1 1/4"
- 1 1/2"
- 2"

Your old blow off valves as well as gate, globe and check valves can be reconditioned in our machine shop. See pages 58 & 59 for more information.

Very often, repair parts for Yarway valves are quite costly and delivery quite long suggesting a new valve be considered.



STRAIGHTWAY VALVE—
FLANGED
Iron body, FIG. 3484-R
Steel body, FIG. 3488-R



ANGLE VALVE — FLANGED
Iron body, Fig. 3482-R
Steel body, Fig. 3486-R
(1 1/2", 2", 3 1/2")

	1	1 1/2	1 1/2	2	2 1/2
YW3482-R1112					
3484-R					
3486-R					
3488-R					

P.O.A. — Please call with valve and parts needs.